

UT373

Mini Non-contact Tachometer User Manual

I. Instruction

UT373 is a stable,safe and reliable non-contact tachometer. The core of the design is the microcontroller, photoelectric speed sampling processing, unique design makes it a superior performance tachometer.

⚠ Warning:

To avoid electric shock or injury, please read Safety Instructions and Warnings before operating this product.

II. Open Box Inspection

Open the package box and take out the device. Please check whether the following items are deficient or damaged and contact your supplier immediately if they are.

- 1.Battery 1.5V AAA----- 3 pcs
- 2.Reflective strips----- 6pcs
- 3.User manual----- 1pcs

III. Safety Instruction

In this manual, a Warning identifies conditions and actions that pose hazard(s) to the user or the test device.

- 1) Before use, inspect the tachometer for any damage. Pay particular attention to the insulation cover and the display screen. Do not use the meter if it is not working properly
- 2) Follow the operation instructions.
- 3) Do not point the laser directly into eyes.
- 4) Do not change the internal circuit.
- 5) When low power symbol  appears, replace the battery as soon as possible. Remove the battery if the meter is left unused for long time.
- 6) Do not store or use the meter in high temperature, high humidity, explosive, or strong magnetic field environments.
- 7) Use soft cloth and detergent to clean the case, do not use abrasants or solvents.

LASER SAFETY PRECAUTIONS:

This product emits a visible beam of laser light.Avoid exposure to the laser radiation. :

WARNING

- Do not press the PWR button while looking into the laser emission aperture. You may damage your eyes.
- Do not aim at eyes.
- Do not point the laser at people.
- Do not look at lasers with other optical instruments such as lenses or binoculars. You may damage your eyes.
- When not measuring, keep your fingers away from the PWR button to avoid accidentally emitting the laser.
- When not in use for an extended period, remove the battery.
- Do not disassemble, remodel, or repair the product. The laser emission may be harmful to your health. If the product is disassembled, remodeled, or repaired, it is no longer guaranteed by the manufacturer.
- Store the product in a place out of reach of children.

LASER RADIATION

AVOID DIRECT EYE EXPOSURE

CLASS 3R LASER PRODUCT

compliance with IEC/EN 60825-1, EN 50689.

IV. Symbols

	Warning
	Low power
	Comply with European Union standards

V. Structure(figure 1)

- 1. Laser emission and receiving terminal
- 2. Case
- 3. Panel
- 4. Display screen
- 5. Functional buttons

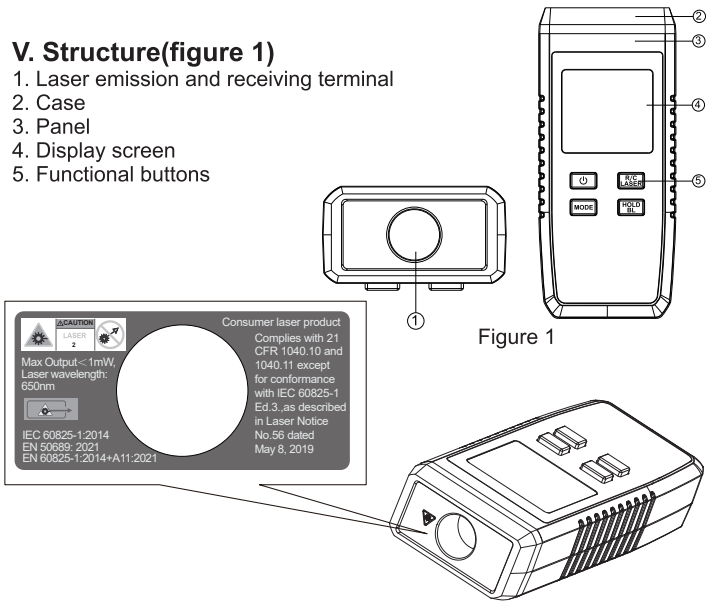


Figure 1

VI. Indicators (figure 2)

- 1. Data hold
- 2. Laser ON
- 3. Maximum value
- 4. Minimum value
- 5. Low power
- 6. Signal receiving
- 7. Count measurement
- 8. Auto power off
- 9. RPM measurement




Figure2

VII. Buttons and setup

- 1. :Short press: Power ON/OFF, long press: switch ON/OFF auto power off function.  indicates auto power off .
- 2. :Short press: switch between RPM and COUNT modes. Long press: turn ON/OFF the laser.
- 3. :Under RPM mode: short press  to see past records (maximum or minimum value) ; long press  to delete the records. If there is signal input after power ON, maximum and minimum value will be recalculated. Under COUNT mode: press MODE to reset the count to zero.
- 4. :Short press to turn ON/OFF data hold function. Long press to turn ON/OFF backlight.

VIII. Operation instructions

- 1. RPM measurement (see figure 3)

⚠ Warning:

To avoid injury and damage , keep the distance between tachometer and the object over 50mm.

- 1) Stop the rotating device
- 2) Cut the reflective strip(10mm *10mm) and place on rotating device.
- 3) Fix the meter to a location 50~200mm from the rotating object.
- 4) Short press  to turn on the meter, point the laser to the relective strip (vertical angle≤30°)
- 5) Turn on the rotating device to measure.

⚠ Note:

When measuring RPM<50, pulse period may be long. Keep the meter still to ensure accuracy. Wait for the above two pulse signals to be accurate. The reading does not change if pulse period longer than 7 seconds. If rotating speed>99999RPM, OL symbol appears to indicate overrange.




Figure 3

2. Count measurement

For illuminant objects

- 1) Fix the meter to a location 50~200mm from the rotating object. (vertical angle $\leq 30^\circ$)
- 2) Short press to turn on the meter and short press to select measurement mode. Point the laser to the objects to be measured.
- 3) After scanning the illuminant objects, the meter accumulate the count and display the quantity.

Note: Object to be measured should be illuminant.




Figure 4

For objects with external optical source.

- 1) Fix the meter to a location 50~200mm from the rotating object. (vertical angle $\leq 30^\circ$)
- 2) Fix the optical source to the location at the other side of objects and opposite to the meter.(figure5)
- 3) Short press to turn on the meter, long press to turn off the laser.
- 4) When the objects pass by the meter and optical source the meter will accumulate the count and display quantity.

Note: If quantity >99999, OL symbol appears to indicate overrange. Press to reset the reading to 0.




Figure 5

IX. Technical specifications

1. General specifications

- Maximum display: 99999
- Overrange display: OL
- Low power:
- Refresh rate: 1s~7s(according to rotating rate)

- Sensor type: photosensitive diode and laser tube
- Measuring distance: 50mm~200mm
- Drop test: 1m
- Battery: 1.5V(AAA)

2. Operating environment

- Indoor
- Altitude: ≤ 2000 meters
- Safety standards : EN61326-1, EN61326-2-2
- Class of pollution: 2
- Operating temperature: $0^\circ\text{C}\sim 50^\circ\text{C}$ ($32\sim 122^\circ\text{F}$) ($\leq 80\%\text{RH}$)
- Storage temperature: $-20^\circ\text{C}\sim +60^\circ\text{C}$ ($-4\sim 140^\circ\text{F}$) ($\leq 80\%\text{RH}$)

3. Electric specifications

- Ambient temperature: $23^\circ\text{C}\pm 5^\circ\text{C}$ ($64.4\sim 82.4^\circ\text{F}$)
- Ambient humidity: $\leq 80\%\text{RH}$

(1) RPM

Range	Resolution	Accuracy
10~9999.9r/min	0.1r/min	$\pm (0.04\%+2)$
10000~99999r/min	1r/min	

(2) COUNT

Range	Resolution	Max input frequency
0~99999	1 digit	10KHz, 5% of pulse width

⚠ Warning:

To avoid false reading and injury, please do not open the case of the meter.

X.Maintenance

1.General maintenance

- The maintenance and service must be implemented by qualified professionals or designate departments.
- Clean the case with a dry cloth. Do not use abrasants or solvents.

2.Battery installation & replacement.

The meter uses three AAA 1.5V alkaline batteries for operation.

To install or replace the battery:

- Unscrew the battery cover, remove the cover and install new batteries ensuring that the correct polarity is observed.
- Use the batteries of the same type
- Replace the battery and screw up.




Figure 6

The contents of this manual are subject to change without prior notice

UNI-T

UNI-TREND TECHNOLOGY (CHINA) CO., LTD.

No6, Gong Ye Bei 1st Road,
Songshan Lake National High-Tech Industrial
Development Zone, Dongguan City,
Guangdong Province, China
Tel: (86-769) 8572 3888
<http://www.uni-trend.com>